


Secondary Port Injector with Return System plumbing for Direct Injection with swirl pot Recommended

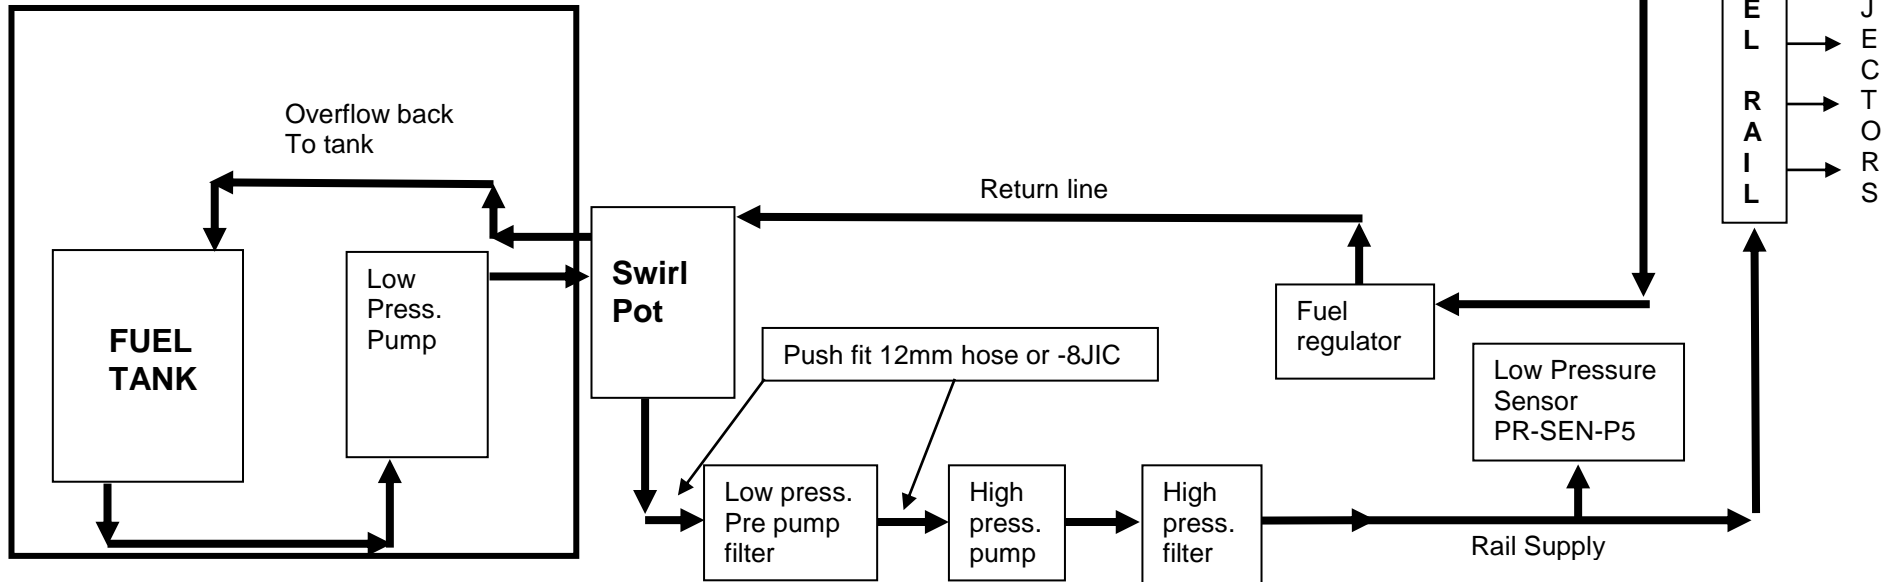

High press pump must be mounted
below level of swirl pot.

Important Notes

1. On long runs use Teflon braided hose.
2. On short runs use rubber braided hose.
3. Use straight connectors where possible as they are approx. 1/3 of the price of angled ones.
4. High-pressure & Return to swirl pot couplings use JIC -6.
5. Pump supply for port injectors is 3Bar (static without vacuum pipe fitted) on SBD set using 690P.
6. We do NOT recommend the use of Bosch 044 pump, current draw too high, use FP1 or intank pump.
FP1 @ 3Bar = 9amps, @6Bar=13amps 450bhp, Intank pump @3Bar= 8amps, @6Bar=11.5amps, 550bhp



SBD Motorsport Ltd
Unit 15, Red Lion Business Park, Red Lion Road, Surbiton, Surrey. KT6 7QD
Tel:0208 391 0121
Email:sbdmotorsport@btconnect.com
Website:sbdev.co.uk