


SBD Plumbing of fuel system with swirl pot (Recommended)



Notes.

1. On long runs use Teflon braided hose.
2. On short runs use rubber braided hose.
3. Use straight connectors where possible as they are approx. 1/3 of the price of angled ones.
4. High-pressure & Return to swirl pot couplings use JIC -6.

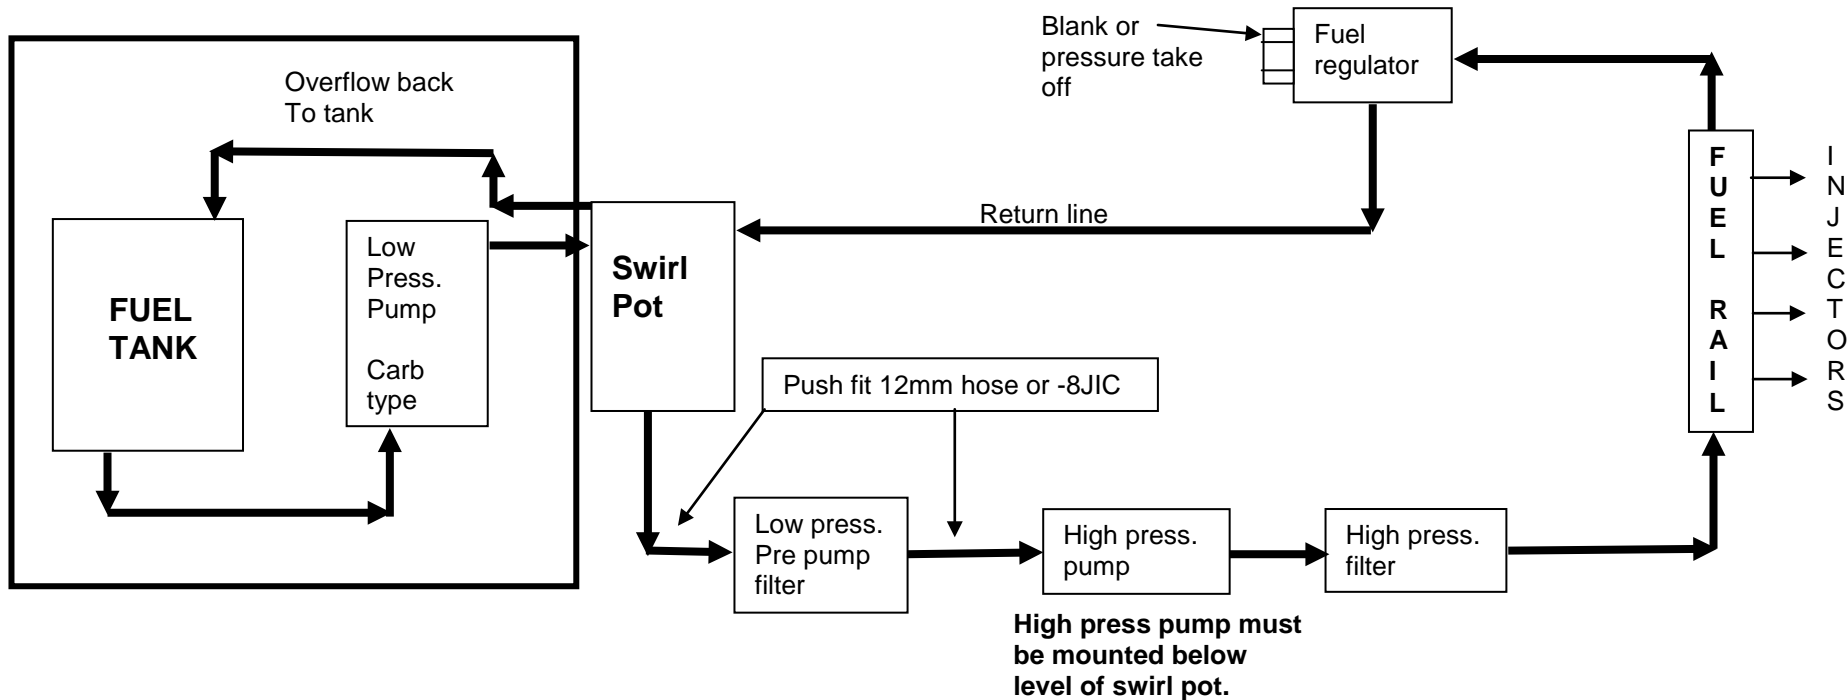