


LM995-DISPLAY-GSX-01 Connection details

This loom is designed to be used with our wiring harness, it is a direct plug in sub loom and no modification to the wiring is required.

Please follow the instructions below:

The 995 Display gathers its data via CAN communication, normally on our Engine harness the CAN connector is un used except when programming/communicating with the ECU via a laptop, the 995 Display loom has a second CAN connector looped from the original to allow the Display to be left plugged in whilst having a laptop also plugged in.

The Display harness needs to be plugged in as shown below:

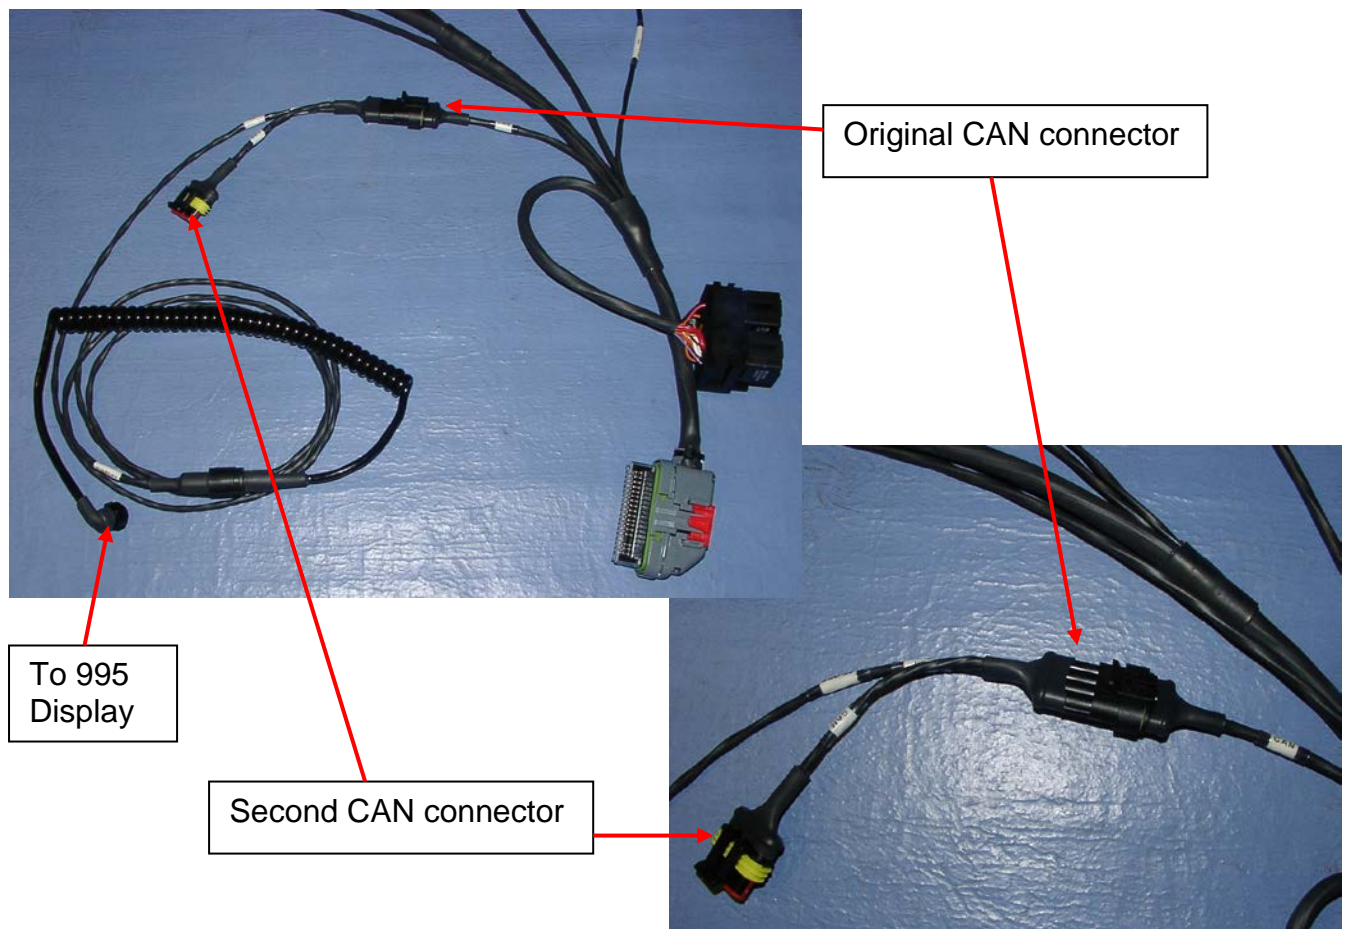

Pin outs of CAN connector

This information is for reference only; generally it should not be required.

Connector	Description	992
Pin 1 =	IGN. Switch 12V	N/A
Pin 2 =	Power Ground	N/A
Pin 3 =	CAN Low	Pin 8
Pin 4 =	CAN High	Pin 9



SBD Motorsport Ltd
Unit 15, Red Lion Business Park, Red Lion Road, Surbiton, Surrey. KT6 7QD
Tel:0208 391 0121
Email:sbdmotorsport@btconnect.com
Website:sbdev.co.uk